# **30T**SERIES



E33T5

Technical data sheet for

# E33T5 ON THE SK33 STAND

Half Size Electric Convection Oven
TOUCH SCREEN CONTROL on a Stainless Steel Stand



E33T5 OVEN





## F33T5

Unit shall be a Moffat electrically heated Turbofan convection oven E.T.L. listed and NSF-4 listed. The oven shall have a one piece porcelain enameled oven chamber, stainless exterior top and sides. The oven shall have a vented safe touch side hinged door with slam shut latching and pendulum operation door handle. Oven shall have capacity for 5 half size sheet pans or 5 12" x 20" steam pans. The oven shall have selectable moisture level injection and a 2 speed oven fan. The oven shall be controlled by a 5.7" Touch Screen control with manual and recipe operating modes with icon driven recipe programs and individual shelf control operation mode and multiple stage cooking. Oven controller shall have USB port for recipe file uploading and downloading. A core temperature probe M236060 is optional. The oven shall include dual halogen oven lamps. The oven shall be able to be bench mounted on 3" feet or mounted on oven stand model SK33. Unit shall be supplied in 100% recyclable shipping packaging. This unit shall be Energy Star certified.

## SK33

Unit shall be a Moffat Turbofan stainless steel oven stand NSF-4 listed. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 5 tray runners suitable for up to 5 half size sheet pans or 5 12" x 20" steam pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E33D5 and E33T5. Unit shall be supplied in 100% recyclable shipping packaging.

## STANDARD FEATURES

- 5 half size sheet pan capacity
- 5 12" x 20" hotel pan capacity
- 3½" / 85mm tray spacing
- Compact 24" / 610mm width
- Touch Screen control
- Program and manual modes
- Icon driven program menu
- Multiple stage cooking
- Individual shelf control and shelf timers
- Auto-Start mode
- Energy Save Set-Back mode
- · Straight or Flex cooking time
- Core probe cooking (optional Core probe Kit)
- USB port for program/icon updating
- Moisture injection mode (5 levels)
- 2 speed bi-directional reversing fan system
- 5.8kW heating (220-240V) / 5.2kW heating (208V)
- Safe-Touch vented side hinged door
- Slam shut door latch
- Pendulum operation door handle
- Porcelain enameled oven chamber
- Push fit continuous oven door seal (no tools)
- Dual halogen oven lamps
- Anti-skid 2" / 50mm dia. 3" / 76mm high adjustable stainless steel feet
- 5 oven wire racks supplied
- 100% recyclable packaging

## **ACCESSORIES**

- Optional M236060 Core Temperature Probe Kit
- Turbofan SK33 Oven Stand
- DSK33 Double Stacking Kit



# **30T**SERIES

# turbofanbolt

E33T5

## E33T5 Half Size Convection Oven TOUCH SCREEN CONTROL

Porcelain enameled fully welded oven chamber Stainless steel front, sides and top exterior Stainless steel oven fan baffle and oven vent Removable 5 position stainless steel side racks Stainless steel frame side hinged door 0.2" / 5mm thick door outer glass 0.2" / 5mm thick low energy loss door inner glass Stainless steel control panel

Aluminised coated steel base and rear panels

## CONTROLS

5.7" LED backlit touch screen Icon driven program menu BMP image icon imports via USB port Program updates via USB port Temperature range 85-500°F Adjustable sounder tones and volume Other specification on request Safety thermostat cut-out Optional core temperature probe

## CLEANING

Stainless steel top and side exterior panels Porcelain enameled oven chamber Fully removable stainless steel oven side racks Removable stainless steel oven fan baffle Easy clean door system with hinge out door inner glass

(no tools required)

Removable push fit oven door seal (no tools required) 3" / 76mm high stainless steel feet for easy access underside

## **SPECIFICATIONS**

Electrical Requirements 208V, 60Hz, 1P+N+E, 5.4kW, 26A 220-240V, 60Hz, 1P+N+E, 6.0kW, 25A No cordset supplied

Water Requirements (optional) Cold water connection 34" GHT male

80psi maximum inlet pressure / 20psi minimum inlet pressure

### External Dimensions Width

24" / 610mm 28¾" / 730mm including 3" / 76mm feet Height 26¾" / 680mm Depth

Oven Internal Dimensions Width 13" / 330mm Height 20¼" / 515mm 22½" / 570mm Depth 3.53ft<sup>3</sup> / 0.10m3 Volume

Oven Rack Dimensions Width 13" / 330mm 20<sup>7</sup>/8" / 530mm Depth

Nett Weight (E33T5) 158lbs / 71.5kg

Packing Data (E33T5) 205lbs / 93kg

Width 25¾" / 655mm 31¾" / 805mm Height 32¾" / 830mm Depth 15.5ft<sup>3</sup> / 0.44m3 Volume

## SK33 Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan

E33D and E33T Series ovens 5 position tray runners standard

Welded 1½" / 38mm and 1¼" / 32mm square tube front and rear

frames

Welded rack supports/side frames

3" / 76mm diameter swivel castors standard with 2 front

castors wheel and swivel lock Supplied CKD for assembly on site

External Dimensions (SK33 Oven Stand)

24" / 610mm 345/8" / 880mm Width Height 255/8" / 650mm Depth Nett Weight (SK33 Oven Stand)

40lbs / 18kg

Packing Data (SK33 Oven Stand)

45lbs / 20.5kg 3.53ft3 / 0.10m3

29¾" / 755mm Width 31¼" / 795mm Height Depth

## INSTALLATION CLEARANCES

2" / 50mm 2" / 50mm 3" / 75mm Rear LH Side RH Side\*

For fixed installations a minimum of 20" / 500mm is required

for service

## CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 12" / 300mm from the appliance sides is

required

# **MOFFA**

www.moffatusa.com www.turbofanoven.com

U.S.A.

Moffat Inc


3760 Industrial Drive, Suite B

Winston-Salem

NC 27105-2637

Ph Toll Free 1-800-551 8795

Ph 336-661 0257 Fax 336-661 9546 Email sales@moffat.com www.moffatusa.com

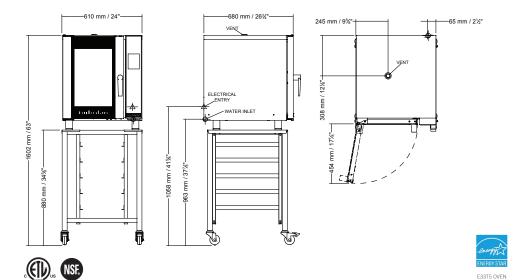

Manufactured by: Moffat Limited 45 Illinois Drive, Izone Business Hub Rolleston 7675, New Zealand



ISO9001 Quality Management

Designed and manufactured by



ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd US.TFN.S.1701

an Ali Group Company

